

DX 12012  
12/5

## On Sampling fractions and electron shower shapes

Alexander Peryshkin and Rajendran Raja

Fermilab

September 1991

### Abstract

We study the usage of various definition of sampling fractions in understanding electron shower shapes in a full plate version of the D0 End Cap electromagnetic calorimeter. We show that the sampling fractions obtained by the conventional definition (I) of Average (Live energy in layer)/ average(deposited energy in layer) will not give the best energy resolution for the calorimeter. The reason for this is shown to be the presence of layer by layer correlations in an electromagnetic shower. The best resolution is obtained by minimizing the deviation from the total input energy using a least squares algorithm. The "sampling fractions" obtained by this method (II) are shown to give the best resolution for overall energy. Surprisingly, it is established that the sampling fractions (II) cannot be used to predict the layer by layer energies. This effect is again a result of the correlations.

### Sampling fraction definition method I

We define the inverse sampling fraction  $\mu_I^k$  in method I as the average deposited energy  $D^k$  in layer k divided by the average live energy  $L^k$  in liquid argon in layer k, averaged over a sample of electrons of fixed incident energy. The deposited energy includes energy in Uranium plates, energy in dead material and the liquid argon gaps belonging to that layer.

$$\mu_I^k \equiv \langle D^k \rangle / \langle L^k \rangle \quad (1)$$

where  $\langle \rangle$  denotes average over events. Using this definition, we can calculate the total deposited energy event by event and also the layer by layer deposited energy as a function of the observed live energies.

<i>Momentum</i>	<i>EM1</i>	<i>EM2</i>	<i>EM3</i>	<i>EM4</i>	<i>FH1</i>
10.0	$\mu_I^1$ 12.2	$\mu_I^2$ 12.3	$\mu_I^3$ 16.1	$\mu_I^4$ 19.3	$\mu_I^5$ 139.6
10.0	$\mu_I^1/MIP^1$ 0.39	$\mu_I^2/MIP^2$ 1.08	$\mu_I^3/MIP^3$ 1.43	$\mu_I^4/MIP^4$ 1.56	$\mu_I^5/MIP^5$ 8.1
100.0	$\mu_I^1$ 10.4	$\mu_I^2$ 11.2	$\mu_I^3$ 15.0	$\mu_I^4$ 18.4	$\mu_I^5$ 59.9
100.0	$\mu_I^1/MIP^1$ 0.34	$\mu_I^2/MIP^2$ 0.98	$\mu_I^3/MIP^3$ 1.34	$\mu_I^4/MIP^4$ 1.49	$\mu_I^5/MIP^5$ 3.47
<i>MIP</i>	31.05	11.4	11.23	12.34	17.24

Table 1: Inverse sampling fractions method I for 10 GeV/c and 100 GeV/c electrons. Also shown are the inverse sampling fractions estimated using Minimum Ionizing particles (MIP) and the ratio of Method I/MIP

$$D^{tot} = \sum_k \mu_I^k L^k \quad (2)$$

and the layer by layer deposited energies are

$$D_k = \mu_I^k L^k \quad (3)$$

Table (1) shows the inverse sampling fractions  $\mu_I^k$  for the 4 EM layers and the 1st layer of the Fine Hadronic calorimeter for the D0 end caps. The numbers are obtained from a full plate simulation of the D0 End cap calorimeter using Geant 3.11 for 10 GeV/c and 100 GeV/c electrons.

It can be seen that the inverse sampling fraction increases as the shower proceeds. In particular, the ratio of the  $\mu_I$  to the inverse sampling fraction determined using minimum ionizing particles shows this effect in the second row of table (1)). This is due to mean free path of the average particle in the shower becoming comparable to the Uranium plate thickness, resulting in an increasing amount of tracks terminating in Uranium and not making it into the argon. The effect is particularly noticeable in FH1 where the shower is in

the process of terminating. Using,  $\mu_I$ , we calculate the  $D^{tot}$  and also individual  $D^k$ . Figure (1) is the total energy  $D^{tot}$  calculated using this method. The overall energy resolution in this method is roughly  $40\%/\sqrt{(E)}$ . Figure (2) shows the difference between the calculated event by event quantities  $D^k$  using method I and the Monte Carlo measured  $D^k$  for the various layers.

### Sampling fraction definition method II

In order to optimize the resolution, it is usual to minimize the sum of squares of the difference between the calculated total energy and the input total energy event by event. We minimize  $S^2$  defined as

$$S^2 \equiv \sum_{events} (D^{tot} - \sum_k \mu_{II}^k L^k)^2 \quad (4)$$

To minimize,

$$\frac{dS^2}{d\mu_{II}^j} = -2 \sum_{events} (D^{tot} - \sum_k \mu_{II}^k L^k) L^j = 0 \quad (5)$$

Averaging over the number of events, this yields

$$\langle D^{tot} L^j \rangle = \sum_k \mu_{II}^k \langle L^k L^j \rangle \quad (6)$$

with the matrix  $M^{jk} \equiv \langle L^j L^k \rangle$ , we can solve for  $\mu_{II}$

$$\mu_{II}^a = \sum_j \langle D^{tot} L^j \rangle (M^{-1})^{ja} \quad (7)$$

Table( 2) shows the inverse "sampling fractions"  $\mu_{II}^k$  for the 4 EM layers and the 1st layer of the Fine Hadronic calorimeter for the D0 end caps. The numbers are significantly different from that in table (1) especially in layers 1 and 5. The numbers are obtained from a full plate simulation of the D0 End cap calorimeter using Geant 3.11 for 100 GeV/c electrons and invoking the above minimization algorithm.

Figure (3) is the total energy  $D^{tot}$  calculated using  $\mu_{II}$ .

<i>Momentum</i>	<i>EM1</i>	<i>EM2</i>	<i>EM3</i>	<i>EM4</i>	<i>FH1</i>
	$\mu_{II}^1$	$\mu_{II}^2$	$\mu_{II}^3$	$\mu_{II}^4$	$\mu_{II}^5$
10.0	20.7	14.6	14.8	15.3	26.8
	$\mu_{II}^1$	$\mu_{II}^2$	$\mu_{II}^3$	$\mu_{II}^4$	$\mu_{II}^5$
100.0	21.8	14.6	14.7	15.6	29.1

Table 2: Inverse "sampling fractions" method II for 10 GeV/c and 100 GeV/c electrons

The overall energy resolution in this method is better than method I by almost a factor of 2 and is equal to  $17\%/\sqrt{(E)}$ .

Since  $D^{tot} = \sum_k \mu_{II}^k L^k$ , the tendency is to assume that the deposited energy in the  $k^{th}$  layer is given by  $D^k = \mu_{II}^k L^k$ . It is the purpose of this paper to show that this assumption is false.

Figure (4) shows the difference between the calculated event by event quantities  $D^k$  using method II and the Monte Carlo measured  $D^k$  for the various layers. There is seen to be a major discrepancy between the average values and the calculated values. We explain mathematically the origin of this discrepancy in the following section.

### Deposited energy layer by layer using least squares technique. Method III

The flaw in the above argument is to assume that

$$D^k = \mu_{II}^k L^k \quad (8)$$

This equation is not general enough. The most general linear equation one can write connecting a vector  $L^k$  and another vector  $D^k$  is

$$D^k = \sum_j \Lambda^{kj} L^j \quad (9)$$

where the tensor  $\Lambda^{kj}$  is in general non-diagonal. In the special case where it is diagonal, equation 8 results. In order to determine  $\Lambda$ , since  $D^i$  are known from Monte Carlo, we minimize

$$T^2 = \sum_{\text{events}} \sum_i (D^i - \sum_j \Lambda^{ij} L^j)^2 \quad (10)$$

yielding

$$\frac{dT^2}{d\Lambda^{ab}} = -2 \sum_{\text{events}} (D^a - \sum_j \Lambda^{aj} L^j) L^b = 0 \quad (11)$$

Averaging over events, yields

$$\langle D^a L^b \rangle = \sum_j \Lambda^{aj} \langle L^j L^b \rangle \quad (12)$$

This then yields  $\Lambda$  upon inversion

$$\Lambda^{aj} = \sum_b \langle D^a L^b \rangle (M^{-1})^{bj} \quad (13)$$

We now show that equation (12) implies equation (6). This is demonstrated by summing equation 12 over the subscript a.

$$\sum_a \langle D^a L^b \rangle = \sum_a \sum_j \Lambda^{aj} \langle L^j L^b \rangle = \langle D^{\text{tot}} L^b \rangle \quad (14)$$

But equation 6 implies that

$$\langle D^{\text{tot}} L^b \rangle = \sum_j \mu_{II}^j \langle L^j L^b \rangle \quad (15)$$

This must imply that

$$\mu_{II}^j \equiv \sum_a \Lambda^{aj} \quad (16)$$

i.e. both Method II and method III find the same minimum with the identification made in equation (16). Since the two minima are the same, it can now be seen that the energies  $D^h$  are not obtained by  $\mu_{II}^h L^h$  but are in fact obtained by equation (9).(QED). The "inverse sampling fractions"  $\mu_{II}^h$  cannot be used to compute layer by layer energies. In order to do this one needs the full tensor  $\Lambda$ .

	<i>EM1</i>	<i>EM2</i>	<i>EM3</i>	<i>EM4</i>	<i>FH1</i>
<i>EM1</i>	13.2	-0.6	-0.02	-0.003	1.1
<i>EM2</i>	9.0	9.1	-0.03	-0.06	1.3
<i>EM3</i>	-4.8	7.6	13.9	-1.0	2.1
<i>EM4</i>	2.1	-1.8	1.0	15.7	-0.8
<i>EM5</i>	2.3	0.3	-0.1	0.9	25.4
<i>SUM</i>	21.8	14.6	14.7	15.6	29.1

Table 3: The  $\Lambda$  tensor from method III for 100 GeV/c electrons

Table (3) gives the  $\Lambda$  tensor determined by the Least Squares Minimization. The sum of the columns of this tensor gives the same values as  $\mu_{II}$  as demanded by the mathematics.

Figure (5) shows the difference in the deposited cell by cell energies  $D^h$  computed using equation (9) and the Monte Carlo measured energies  $D^h$ . It can be seen that these predictions are far better than method II and have smaller errors than method I.

### Conclusion

Table (4) summarizes the numerical results for 100 GeV/c and 10 GeV/c electrons.

To conclude, we have demonstrated that the least squares "inverse sampling fractions" cannot be used to compute cell by cell energies in the presence of correlations. This has implications when trying to compare Monte Carlo shower profiles with test beam data. In the former, both the deposited energy and the live energy is available. In the latter only the live energies are known. This paper shows that if an attempt is made to compare deposited energies between test beam data and Monte Carlo, one must use the full  $\Lambda$  tensor to infer the deposited energies. Otherwise an error is made in the shower profile which is as large as 100% in layer 1 for 100 GeV/c electrons.

Method I uses no information from shower correlations and produces a result which has a factor of 2 higher error than methods II and III for total energies. This must imply that additional information is obtained in

Method	$\langle D^{tot} \rangle$	$\sigma(D^{tot})$	Deviation & Sigma deviation				
			EM1	EM2	EM3	EM4	FH1
I	9.78	0.813	$5.1E-3$ 0.191	$2.5E-2$ 0.2200	$3.0E-2$ 0.533	$1.4E-2$ 0.240	$-2.7E-2$ 0.259
II	10.01	0.588	0.4885 0.3375	0.3794 0.2581	-0.4418 0.4809	-0.2255 0.2067	-0.1898 0.0931
$\langle L^k \rangle$			$5.719E-2$	0.156	0.376	$6.01E-2$	$0.201E-2$
$\langle D^k \rangle$			0.699	1.90	6.02	1.15	0.233
%error using method II			70.0	20.0	-7.3	-19.6	-81.5
III	10.01	0.588	-0.0004 0.1899	-0.0014 0.1792	0.0014 0.3951	0.0034 0.1883	0.0018 0.0506
I	100.0	4.095	$-0.6E-3$ 0.407	$1.1E-3$ 0.663	$1.2E-3$ 2.548	$0.7E-3$ 1.431	$1.3E-3$ 0.827
II	99.97	1.752	2.474 1.049	3.071 0.952	-1.302 2.532	-3.247 0.952	-1.144 0.406
$\langle L^k \rangle$			0.225	0.905	4.26	1.15	$3.77E-2$
$\langle D^k \rangle$			2.33	10.14	64.05	21.2	2.24
%error using method II			106.	30.3	-2.0	-15.3	-51.1
III	99.96	1.753	$-1.3E-3$ 0.375	$-1.8E-3$ 0.423	$-2.0E-2$ 1.380	$-9.3E-3$ 0.851	$2.0E-3$ 0.300

Table 4: Comparison summary of three methods for 10 Gev/c and 100 Gev/c electrons. Deviations here are defined as the predicted value - Monte Carlo value

using cell by cell correlations. It is perhaps worth pushing this question of correlations to its absolute limit and ask what the maximum attainable EM energy resolution is in a D0 type calorimeter, if we had digitized information for all argon gaps independently. This work is progressing.

## References

- [1] User's Guide to GEANT 3.11, R.Brun et al, CERN DD-EE-84-1

Monte Carlo e- 100 GeV Method I

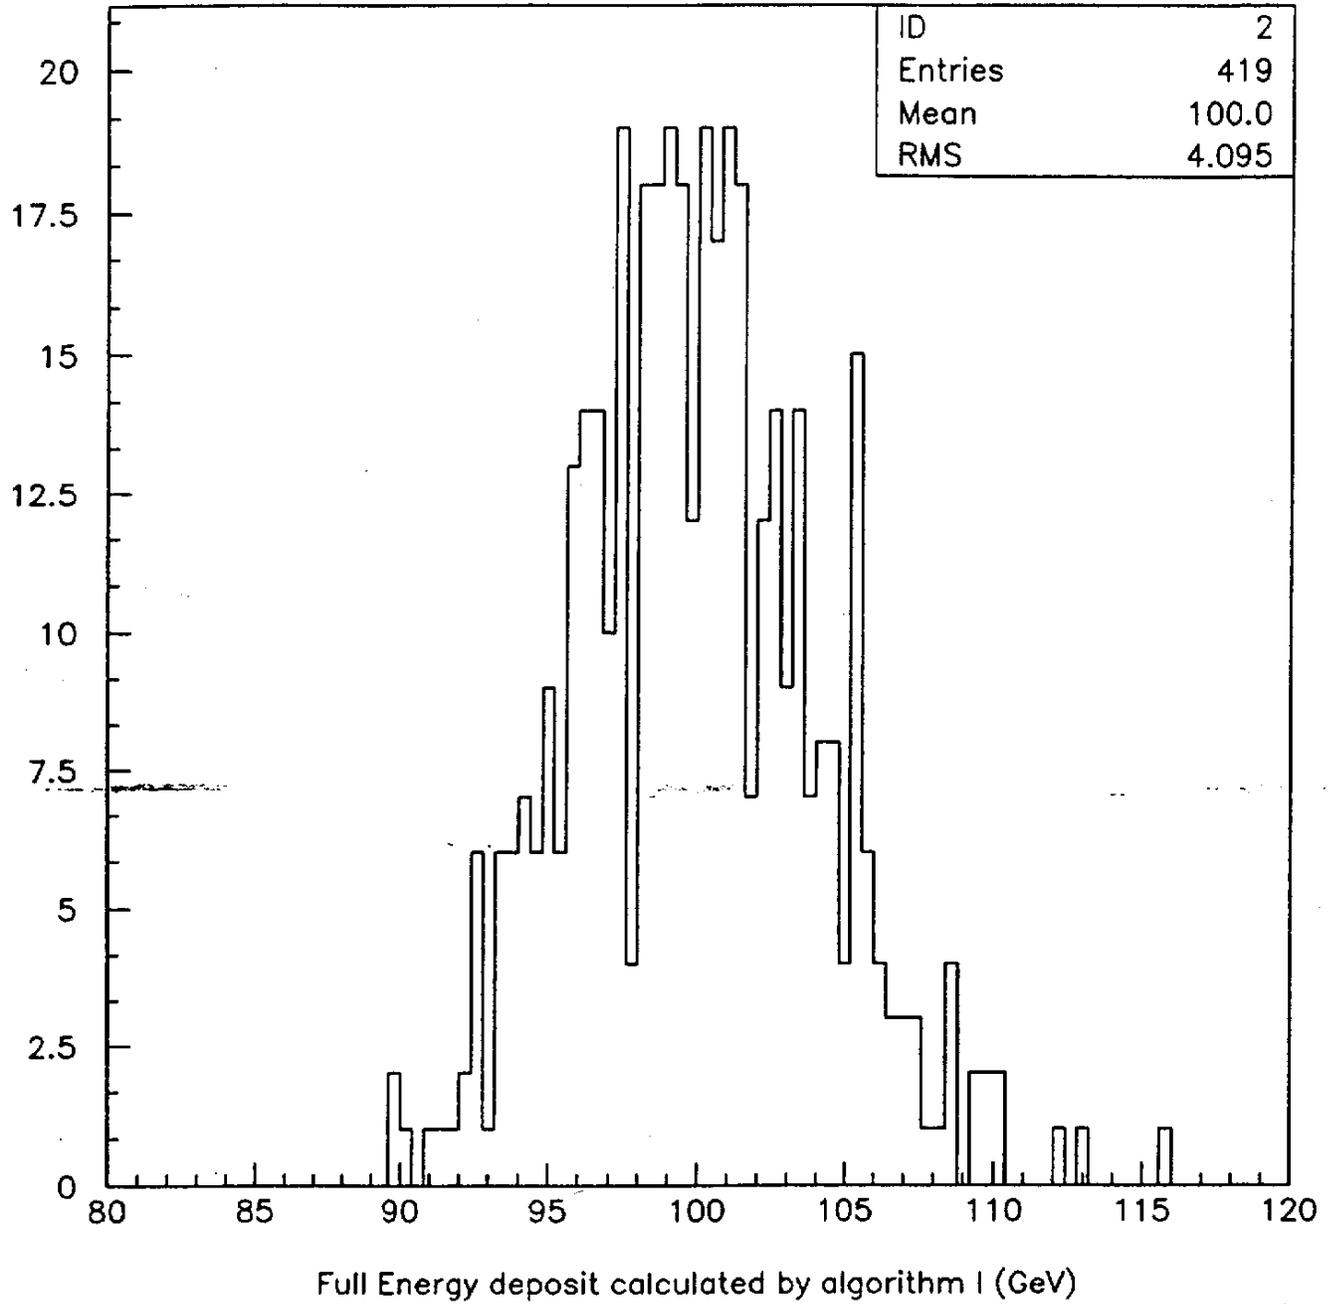


Figure 1: Total energy of electron showers calculated using method I

Monte Carlo e- 100 GeV Method I

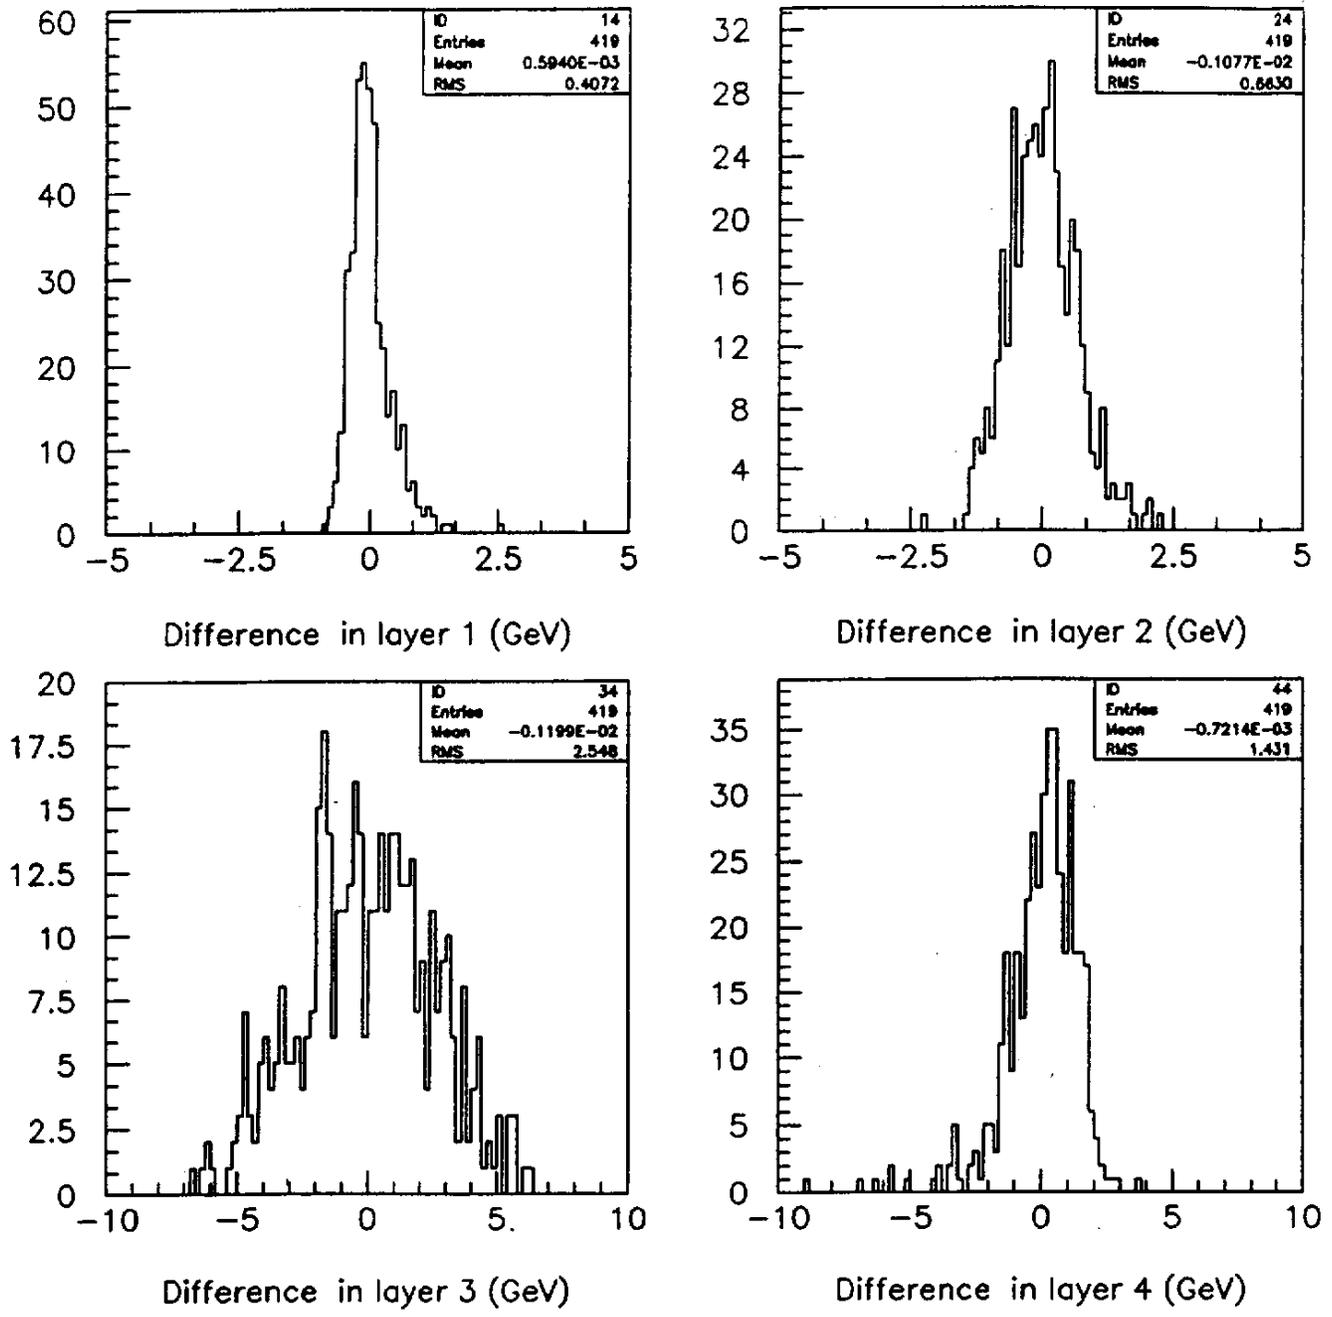


Figure 2: Difference in energy (Monte carlo -predicted ) layer by layer using method I

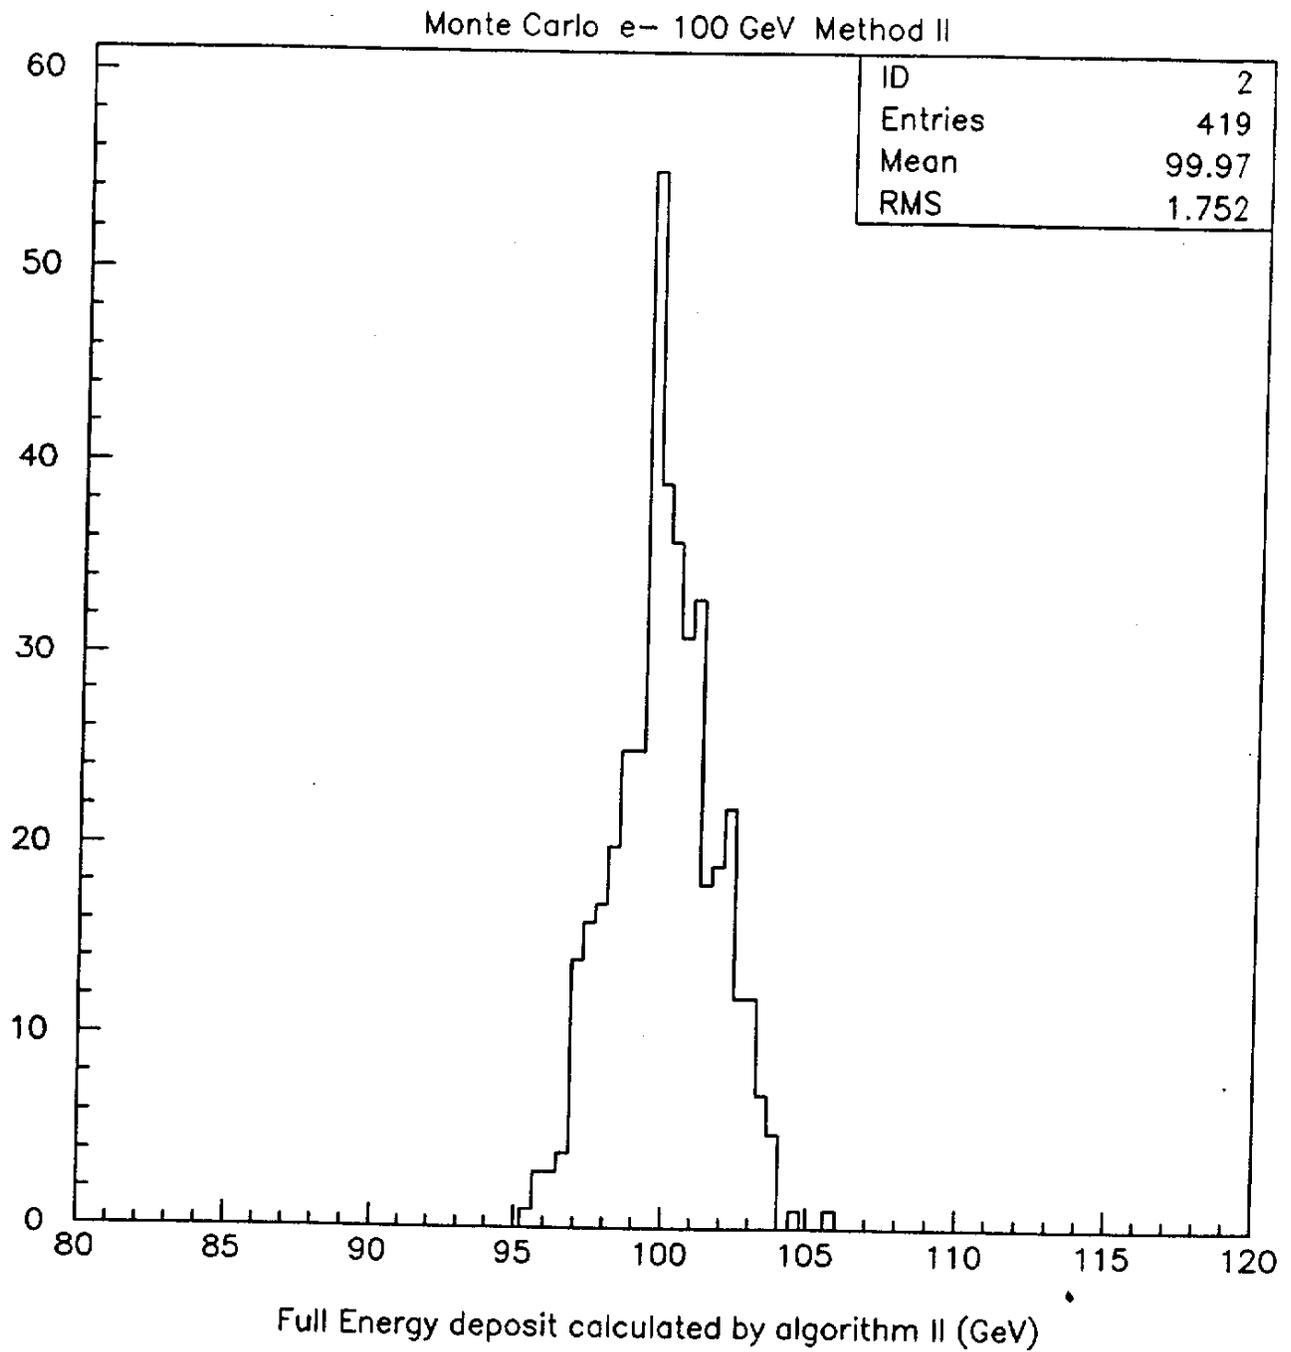


Figure 3: Total energy of electron showers calculated using method II

Monte Carlo  $e^-$  100 GeV Method II






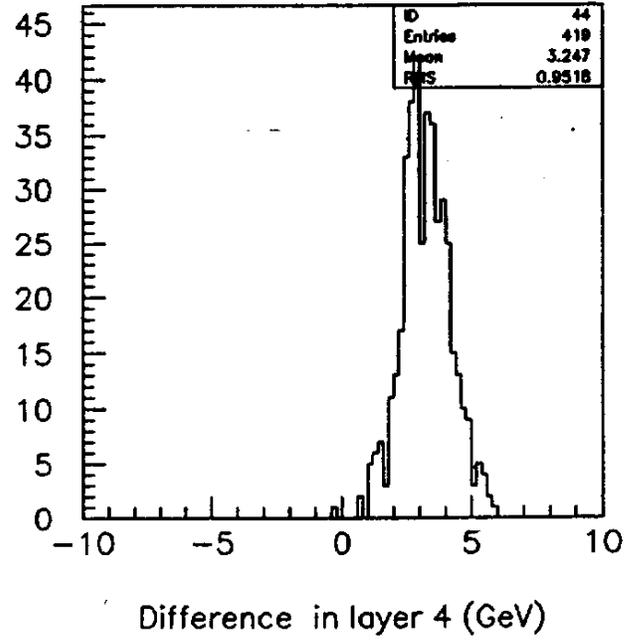


Figure 4: Difference in calculated and measured layer by layers using method II


Monte Carlo e- 100 GeV Method III

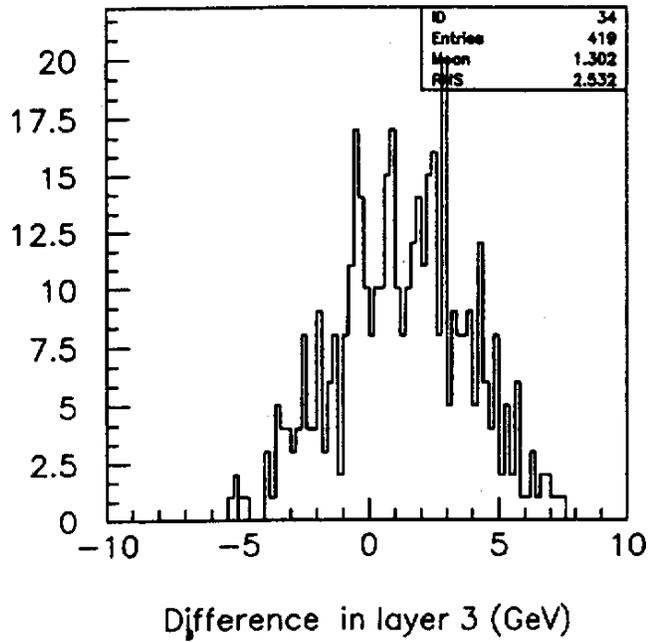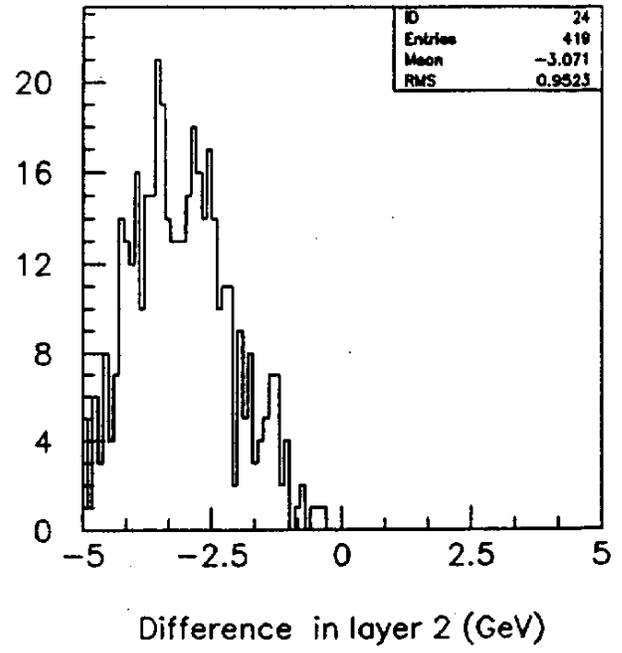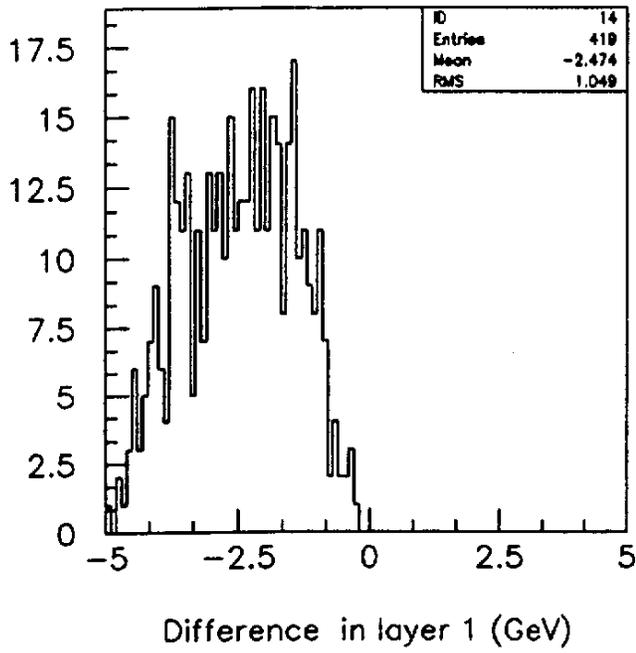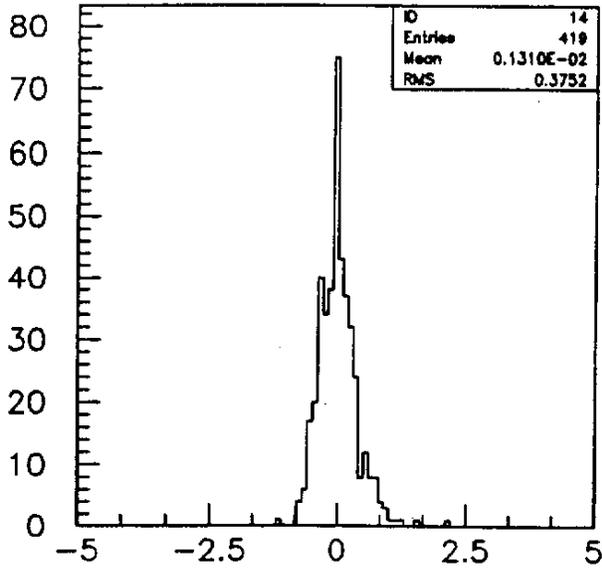


Difference in layer 1 (GeV)

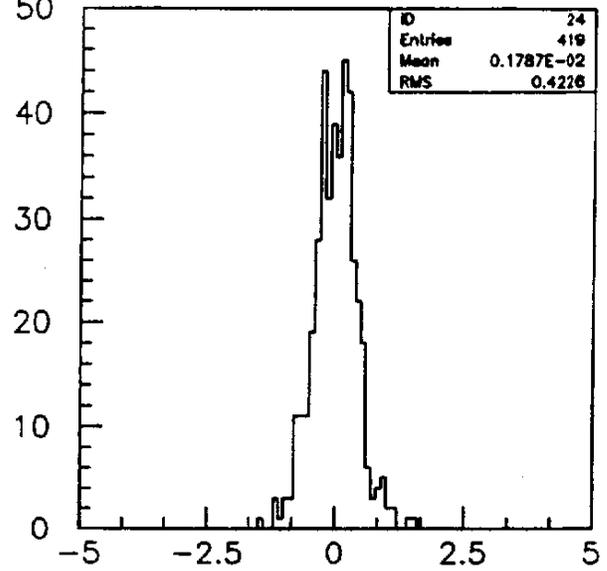

Difference in layer 2 (GeV)

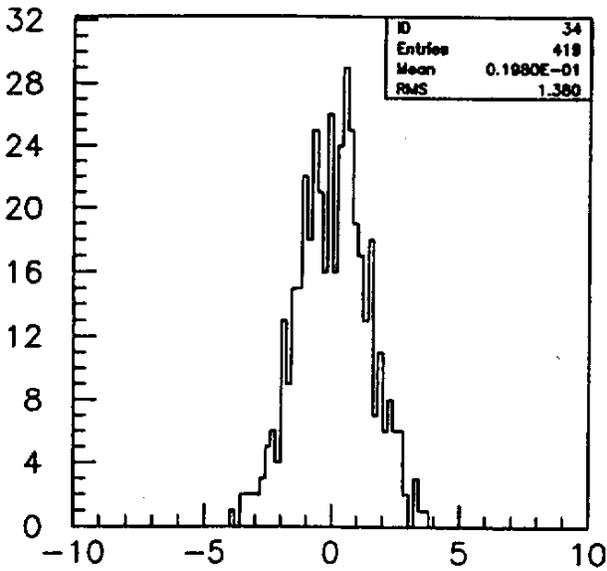

Difference in layer 3 (GeV)

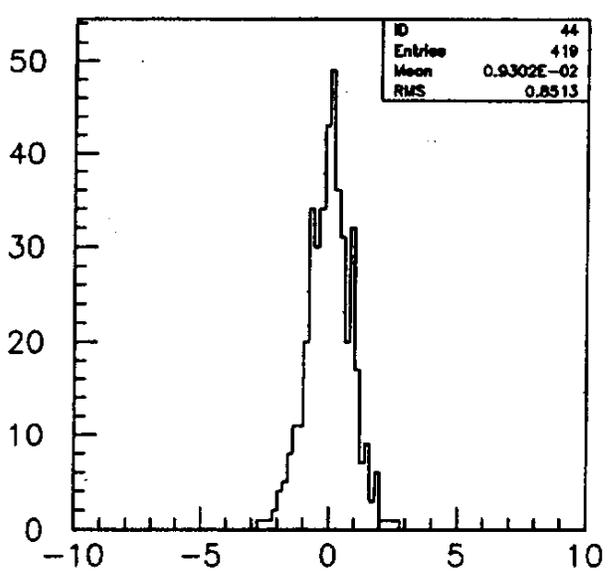

Difference in layer 4 (GeV)

Figure 5: Difference in calculated and measured layer by layers using method III

